

SATAjet® X 5500



German Engineering

Spray Guns | Cup Systems | Breathing Protection | Air Filtration | Accessories



Revolutionary. Efficient. Silent.  
Consistent.

# The revolutionary nozzle system

State-of-the-art paint systems and the latest application recommendations open up new possibilities, but also pose new challenges for professional painters. The SATAjet X 5500 featuring the new X-nozzle system now defines a wholly new application standard for the future.

The concept of this nozzle system is easy and straightforward to understand: Both proven application technologies – HVLP and RP – remain available, but now each of them with the additional choice between "I" and "O"-nozzle sets. In line with the increasing nozzle sizes within each of the respective technology (HVLP / RP), the material flow rate increases too with constant increments – which means that the spray fan size and width remain unchanged across the entire nozzle spectrum. In essence, end-users can now rely on a transparent and consistent system which offers them clear and well-structured application options.

**The "I"-nozzles** produce a parallel spray fan pattern with a minimal dry zone and a drier centre which is ideal for painters preferring a **reduced application speed** and maximum application control during the painting process. The **film build per coat** in comparison to an "O"-nozzle of the same size is **slightly reduced**.

- Parallel spray fan with minimal dry zone
- Improved control during the coating process
- Reduced film build per coat compared to the nozzle

set currently in use or the "O"-nozzle

**"O"-nozzles** do have an oval-shaped spray fan pattern with a larger dry zone and a wet core to accommodate **increased application speed** at the expense of slightly less application control during the painting process. The **film build per coat** in comparison to an "I"-nozzle is **slightly higher**.

- Oval-shaped spray fan with larger dry zone
- Wet core for increased application speed
- Film build per coat slightly higher compared to the "I"-nozzle



SATAjet® X 5500 RP®

## PRODUCT BENEFITS

- Revolutionary: The X-nozzles are taking atomisation to a whole new level
- Noticeably quieter: Whispering nozzle™ due to optimised air flow geometry, reduced noise level in the relevant sound frequency ranges
- Individual: Matches each application requirement, such as specific characteristics of the paint system, climatic conditions and application method (application speed/application control)
- Precise: Optimised material distribution for enhanced spraying uniformity and atomisation with both spray fan shapes
- Low maintenance: No air distribution insert required, thus also ensuring a much easier and faster cleaning process
- Consistent: Constant fan size across the entire nozzle spectrum (within the range of each respective atomisation technology) with linear increases of the material flow rate
- Efficient: The optimised atomisation concept enables to realise considerable material savings using the same application method as before



## NOZZLE SELECTOR

SATAjet® X 5500 HVLP



[www.sata.com/nozzlefinder](http://www.sata.com/nozzlefinder)

### What are the advantages of the X-nozzle system?

Depending on the properties of the paint system, the climatic conditions and the application technique, each painter can now select a spray gun with the suitable nozzle set for their individual requirements. Due to the inherent consistency of the system, it has become safe and easy to choose the correct nozzle option enabling painters to achieve optimum finishes.





Perfectly ergonomic design – the SATAjet X 5500 with optimised shape of the gun handle fits perfectly in the palm of the hand




A uniform and flexibly adjustable spray fan according to the specific requirements – the SATAjet X 5500 for perfect finishes

### What else is new?

Due to the optimised air distribution inside the spray gun body in combination with the new design of fluid tip and air cap, the air distribution insert is no longer required. In addition, we have managed to reduce the noise level of this whispering nozzle during application, giving painters the feeling of a much softer and more comfortable coating process. And the best of all: The X-nozzles considerably reduce paint waste!


## SPRAY FAN SHAPES

### Examples of current fan shapes

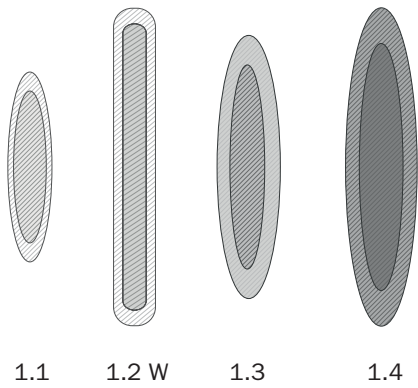


### New with SATAjet X 5500

#### Fan shape I-nozzle HVLP/RP

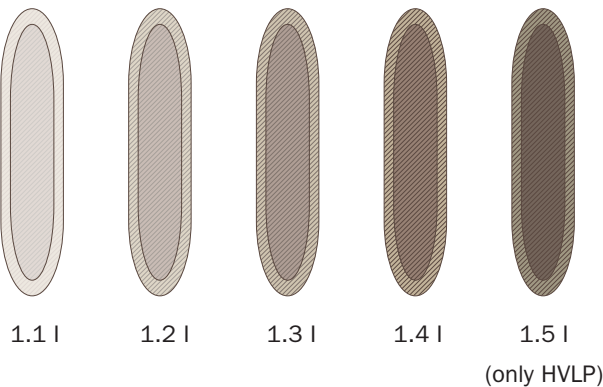

#### Fan shape O-nozzle HVLP/RP

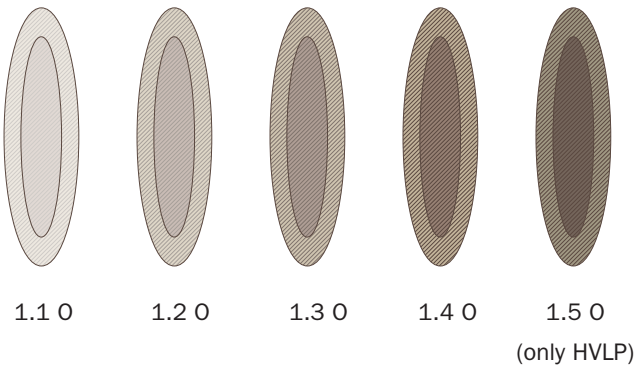

To achieve an optimum spray fan without any compromise, far more factors than just ambient temperature and humidity have to be taken into account. The selected coating material with appropriate additives, the dimensions of the object to be painted, the recommended film thickness, the individual painting habits such as application speed or application control are also playing an important role when choosing the correct nozzle size.

Nozzle range available at product launch  
Please strictly observe the recommendations of the paint manufacturer.

# The SATAjet X 5500, perfection down to the smallest detail



Robust air cap made of chrome-plated brass with QC™ air cap thread for quick change with one turn only.  
Air cap ring:  
green = HVLP technology  
blue = RP technology



**QCC®** – Quick Cup Connector. Bayonet cup connection. Ensures quick and clean cup change as well as easy cleaning.

Fluid tip and paint needle made of corrosion-resistant stainless steel

Material passage (red)

Air passage (blue)

Fluid tip seal ensuring minimal cleaning efforts and safe colour change

Low maintenance, self-tensioning air piston and paint needle packings

Trigger with paint needle protection for an extended lifetime of the paint needle packing

**Option:** Digital pressure display for exact pressure adjustment, perfect colour match and reproducibility



**CCS™** – Color Code System. For the convenient identification of your spray gun.

- Gun suspension hook for convenient storage
- Control elements can be perfectly adjusted even wearing gloves: material flow control with good grip
- Air micrometer for the adjustment of the atomisation air. Highest precision with digital pressure gauge (optional)
- Spray fan control allowing fine adjustment with a half turn only
- Ergonomically shaped gun handle
- Easy to clean, corrosion-resistant anodised surface
- Air connection 1/4" male thread with swivel joint

1 + 2 = 3  
Years Premium Warranty


**Warranty:** Talking quality is not enough – we guarantee it: for three years!

## Two ways to achieve a perfect result: **HVLP** and **RP®**

The "Super Saver" **SATAjet X 5500 HVLP** achieves particularly high transfer rates, due to its low pressure technology.

The "Super Speed" **SATAjet X 5500 RP** with its optimised high pressure technology for maximum application speed and minimum overspray.

Both versions are extremely versatile in application, meeting highest expectations concerning excellent finishes, while far exceeding 65% transfer efficiency rates in accordance with VOC legislation.

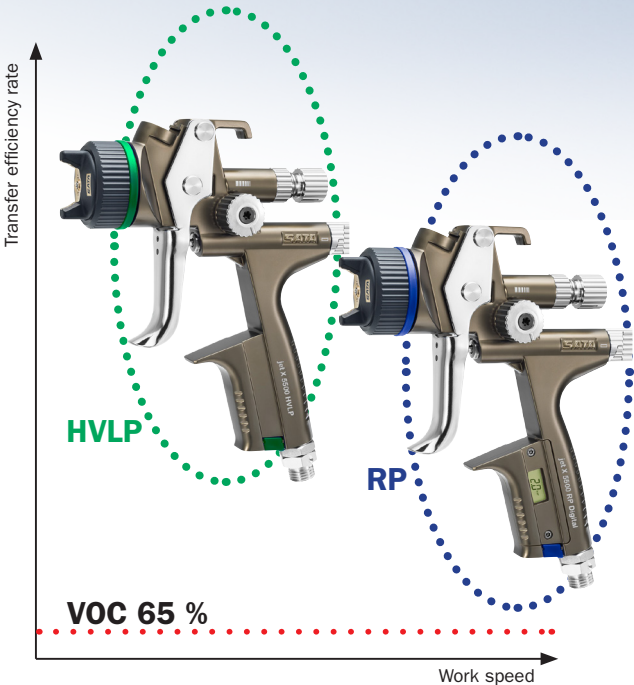

## Perfect for all fields of application – SATAjet X 5500

The SATAjet X 5500, achieving brilliant finishes: Whether it be in car refinish, commercial transportation, coating furniture, marine yachts or high quality industrial components – regardless of the paint system being used.

Whether for basecoat, clear coat or single stage material, please ask your SATA dealer or consult our web-site for the correct nozzle size: [www.sata.com/SATAjetX5500](http://www.sata.com/SATAjetX5500)



Nozzle size*		I-nozzles					O-nozzles				
		1,1 l	1,2 l	1,3 l	1,4 l	1,5 l	1,1 0	1,2 0	1,3 0	1,4 0	1,5 0
	HVLP										
	RP	1,1 l	1,2 l	1,3 l	1,4 l	–	1,1 0	1,2 0	1,3 0	1,4 0	–
Cpl. with each 1x RPS multi-purpose cup 0.6 l / 0.9 l, with swivel joint		1061895	1061902	1061887	1061910	1061928	1061936	1061944	1061952	1061960	1061978
		1061548	1061556	1061564	1061572	–	1061580	1061598	1061605	1061613	–
DIGITAL cpl. with each 1x RPS multi-purpose cup 0.6 l / 0.9 l, with swivel joint		1061994	1061879	1062025	1062033	1062067	1062075	1062108	1062124	1062158	1062166
		1061621	1061647	1061697	1061712	–	1061746	1061788	1061803	1061829	–
Nozzle set		1063619	1063627	1063635	1063651	1063669	1063677	1063685	1063643	1063693	1063700
		1063536	1063544	1063552	1063560	–	1063578	1063586	1063594	1063601	–

\*Nozzle range for market launch

### Accessories:

#### SATA® adam 2™, SATA® adam 2™ black

To upgrade non-digital spray guns to "DIGITAL" the version for retrofitting the SATAjet 5000 Standard without integrated digital pressure gauge. Ensures correct setting and display of the gun inlet pressure for highest reproducibility.

Art. No. 211540

Art. No. 1031723 (black)



#### SATA® RPS®

Replaces reusable plastic cups and fits on the SATA spray guns without adapter. Reduces cleaning effort and helps save solvents. Available sizes: 0.3 l, 0.6 l and 0.9 l.

Art. No. upon request



#### SATA® cert™

Prevent rework before it occurs – with the regular checking of the spray pattern.

Art. No. 161596



#### SATA® care set™

The practical tool bag containing useful utensils for gun cleaning and maintenance. Items marked with a red surround are not included in the scope of delivery.

Art. No. 162628



Further useful accessories like air hoses, respirators, air filter regulators etc. are available from your SATA dealer.

Your SATA dealer



SATA GmbH & Co. KG  
Domertalstraße 20  
70806 Kornwestheim  
Deutschland  
Tel. +49 7154 811-200  
Fax +49 7154 811-194  
[www.sata.com](http://www.sata.com)